

THE LOG PROCESSING



KNIVES FOR VENEER & PLYWOOD

Heating Furnace▷



Water Quenching Equipment▽




▽JSK TCT Circular Saw Grinding Machine



▽Vertical Knife Edge grinding machine



▽CHIPPER KNIFE

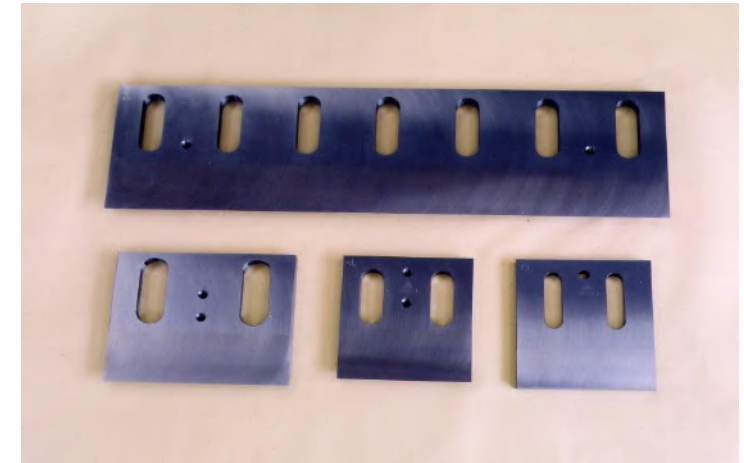

THE STANDARDS SIZE OF VENEER KNIFE & ACCESSORIES

VENEER KNIVES

●UROKO-TYPE

3360×200×16

2760×200×16

2300×200×16

1524×200×16

●CHINA-TYPE

2760×200×16

1400×180×16

1400×170×6

●MEINAN-TYPE

1500×170×16

●TAIHEI-TYPE

3350×200×16

2750×200×16

2400×200×16

1500×200×16

PRESSURE BARS

●UROKO-TYPE

3360×74×40

2760×74×40

2300×74×40

1524×74×40

●TAIHEI-TYPE

3350×100×25

2750×100×25

2400×100×25

1500×100×25

CLIPPER KNIVES

●UROKO-TYPE

3354×100×10

2744×100×10

2300×100×10

1524×100×10

●TAIHEI-AUTO

1500×90×9

●HONG AN

2700×25×7.8 UROKO

1520×100/90×10

●HASHIMOTO-ARISUN

1520×95×12

1550×50×15

●MINAMI CORE BUILDER

675×115×10

1350×100×12

SPUR KNIVES

250×25×7.8 UROKO

205×25×6 TAIHEI

300×15×10 CREMONA

T.C.T. CIRCULAR SAWS

305×3.2×60×100 UROKO

305×3.2×60×120 //


305×3.2×65×100 TAIHEI

305×3.2×65×120 //

305×3.2×25.4×100 STANDARD

305×3.2×25.4×120 //

305×3.4×75×24 KIKUKAWA

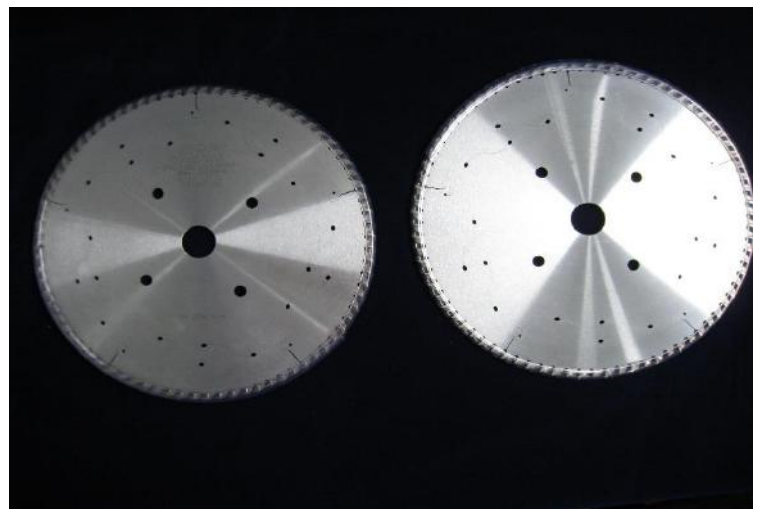

OTHERS

●GRINDING WHEELS 【TAKAKURA】

255×100×205 WA46J

●SUPER COOLANT 20 LITER

Vertical Knife Edge grinding machine(KS250)



Grinding wheel motor power	Grinding wheel diameter	Carriage speed	Clearance between grinding wheel and chuck	Magnetic chuck width
5.5kW (7.5HP)	Ø255mm	1 - 30 m/min	110 mm	200mm
Grinding length (mm)	Overall dimensions (mm)			/
1500(5F)	3600	1300	1700	
3100(9F)	5250	1300	1700	

Upon request:

- Grinding wheel motor power 11 kW (15 HP), 15 kW (20 HP), 18.5 kW (25 HP);
 - Segment grinding wheel Ø300 mm;
 - Siemens digital PLC programmer with touch screen;
 - Magnetic chuck with thin polarity 12/14 mm;
 - Magnetic chuck width 200mm;
 - Quick change of the grinding wheel;
 - Variable speed of the grinding wheel;
 - Slow carriage speed (0,3 - 25 m/min);
 - Wheel wear compensation system RTS;
 - Automatic lubrication of the sliding blocks;
 - Magnetic cleaner with rotating discs;
 - Manual and automatic paper filters;
 - Additional super-finishing head 1.1 kW;
 - Additional grinding head 3.7kW with manual or automatic down-feed;
- Extraction system.





Mouri Bid.room 504.2-14-5 Kojima,Tokyo,111-0056 Japan

Tell:+81-3-5822-0880 FAX:+81-3-3862-2882

HP: <https://www.jskcorp.co.jp/>

sole agent

PT FAJAR ABADI MASINDO

**Jl Rawa Gatel Kav 10/4 Kawasan Industri
Pulogadung,Jakarta 13930**

[TEL:\(021\)4600049\(Hunting\).](tel:0214600049)

FAX:(021)4611295

(021)4611293